

# SERAGE


## RV-DV60IR

High Resolution 2.8-12mm Day/Night Varifocal Camera

1/3" Sony Super HAD CCD II  
 600 TVL Colour/700 TVL B/W  
 2.8-12mm Day/Night Vari Focal Lens  
 0.01 LUX, F 1.2 0.0003 LUX (Sense Up)  
 2nd Video Output  
 25m IR Range adjustable Low/Middle/High/Off  
 800Ma Max with IR on  
 Vandal Proof, IP67  
 3 Axis Eyeball Bracket



### DIMENSION

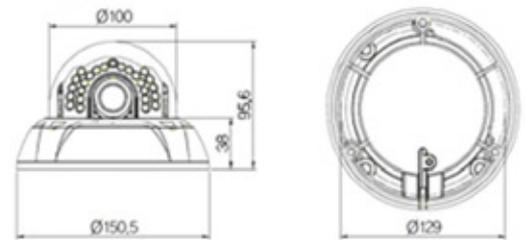

MODEL	RV-DV60IR
Image Sensor	1/3" COLOR SONY SUPER HAD CCD II
Pixel	410K
Scanning	2:1 Interlace
Sync. Type	Internal/External (Line-Lock) - Option
Resolution	600TV-Line 700TV-Line B/W
Video Output	1.0Vp-p(Sync. Negative) Termination 75Ω
S/N Ratio	52dB or Over (AGC OFF)
Min. Illumination	0.01 Lux(F/1.2), 0.0003 Lux(Sense up)
Gamma	Y=0.45 typ. (0.45, 0.6, 1.0 user)
Shutter Speed	1/60(1/50) ~ 1/100,000sec
OSD	YES
Motion Detection	ON/OFF (240 Block)
DIS	ON/OFF
Digital Zoom	ON(10X)/OFF
Blemish Compensation	Auto/Off
Impact Detection	LOW/MIDDLE/HIGH/OFF (Option)
Privacy Zone	ON/OFF (8 Zone)
White Balance	ATW(2,500°K ~ 9,500°K)/MANUAL/AWC
Backlight	BLC/LWDR/HLC/OFF
AGC	LOW/MIDDLE/HIGH/OFF
DNR(3G)	LOW/MIDDLE/HIGH/OFF
Communication	RS-485(Protocol : Pelco D, Pelco P) (Option)
Lens	2.8 ~ 12mm Vari-focal Lens
Power Supply	12V DC or 24V AC Dual Voltage
Current Consumption	Max. 800mA (at 12V DC, 24V AC) : LED ON
Fan, Heater	Option, YES
Operation Temp.	-10°C ~ 50°C
Preservation Temp.	-20°C ~ 60°C
Dimension	Ø150.5 x96.5(H) mm
Weight	Approx. 800g

Specifications subject to change without notice



Unit 3 Priory House, Hertford, Hertfordshire, SG14 1NN  
 Tel: 0845 430 1010 Web: rvtv.co.uk Email: sales@rvtv.co.uk